

STAINLESS STEEL STRAINER BASKET MALE BSP

Stainless steel strainer basket male BSP for water networks, water distribution, clean and waste water, glycol solution (max 30%).

1.1 mm mesh up to DN2", 1.6 mm over.



Size : DN3/8" to DN4"
Connection : Male BSP
Min Temperature : +0°C
Max Temperature : +150°C
Specifications : All stainless steel
Cylindrical threading

Materials : AISI 316

STAINLESS STEEL STRAINER BASKET MALE BSP

SPECIFICATIONS :

- Stainless steel threading
- Male BSP ends


USE :

- For water networks, water distribution, clean and waste water, glycol solution (max 30%)
- Min and max Temperature Ts : + 0°C to +150°C

RANGE :

- BSP male threaded, all stainless steel from DN 3/8" to DN 4" **Ref.391**


MATERIALS :

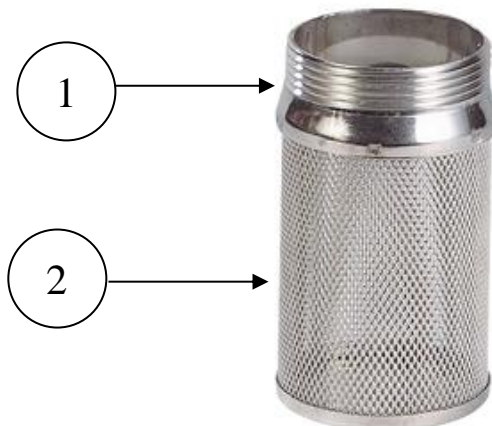

Item	Designation	Materials
1	Threading	AISI 316
2	Mesh	AISI 316

STAINLESS STEEL STRAINER BASKET MALE BSP

SIZE (in mm) :

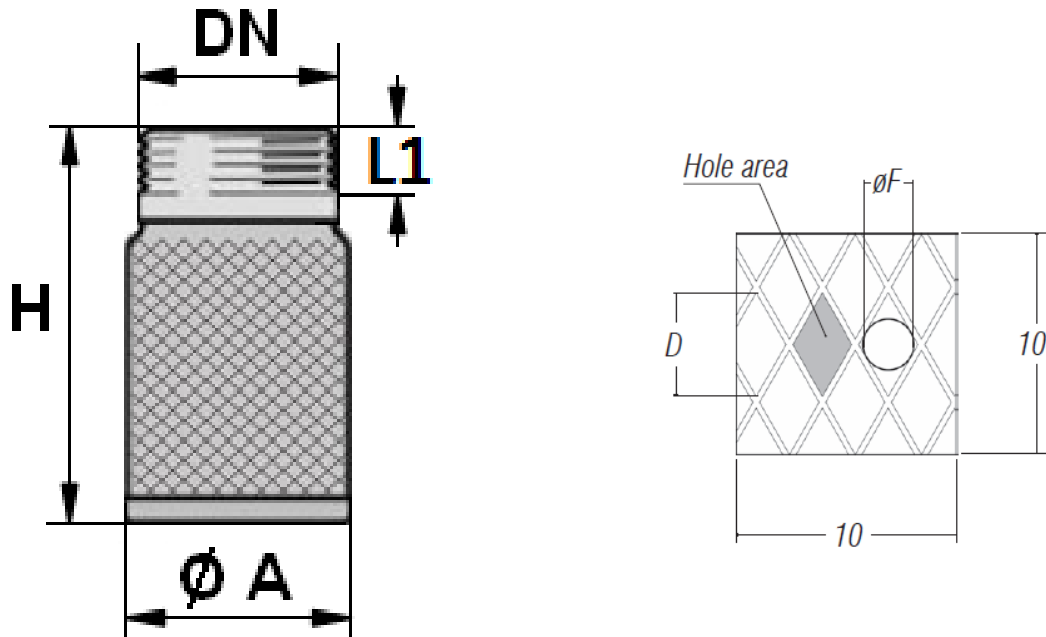

DN	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"	
H	55	56	62	71	80	90	101	110	124	145	
L1	8	10	10	11	15	15	15	18	18	18	
Ø A	19	23	29	37	44	50	62	80	93	116	
Mesh (ØF)	1.1							1.6			
D	2.6							4			
Surface (mm2)	1.6							3.4			
Nb of holes /cm2	23							11			
Weight (Kg)	0.01	0.02	0.03	0.05	0.06	0.08	0.09	0.18	0.2	0.36	
Ref.	391003	391004	391005	391006	391007	391008	391009	391010	391011	391012	

STAINLESS STEEL STRAINER BASKET MALE BSP**STANDARDS :**

- Manufacturer certified ISO 9001 :2015
- DIRECTIVE 2014/68/EU : Products excluded from directive (article 4, § 3)
- Threaded male BSP cylindrical ends according to ISO 228-1

ADVICE : Our opinion and our advice are not guaranteed and Oktogon Kft. shall not be liable for the consequences of damages. The customer must check the right choice of the products with the real service conditions.